
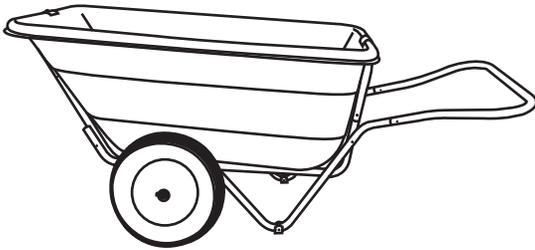
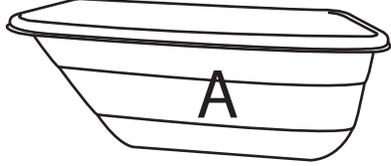

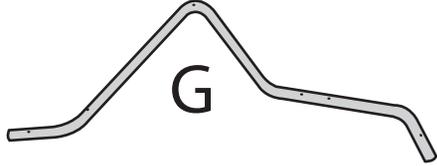





All Terrain Jumbo Cart
Assembly Instructions



 <p>A</p> <p>Tub</p>	 <p>B</p> <p>Axle</p>	 <p>C</p> <p>Handle</p>	 <p>D</p> <p>Tire (2)</p>
 <p>E</p> <p>Cage Support Bottom (2)</p>	 <p>F</p> <p>Cage Support Front/Back (2)</p>	 <p>G</p> <p>Leg Support (2)</p>	
 <p>H</p> <p>Lip Protector (2)</p>	 <p>I</p> <p>Large Washer (2)</p>	 <p>J</p> <p>Skid Cap (2)</p>	 <p>K</p> <p>End Cap (2)</p>
 <p>L</p> <p>Wing Nut (2)</p>	 <p>M</p> <p>Nut (16)</p>	 <p>N</p> <p>Cotter Pin (2)</p>	 <p>O</p> <p>Small Washers (36)</p>
 <p>P</p> <p>1 1/2" Screw (6)</p>	 <p>Q</p> <p>1 3/4" Screw (2)</p>	 <p>R</p> <p>1 15/16" Screw (2)</p>	
 <p>S</p> <p>2 3/8" Screw (4)</p>		 <p>T</p> <p>2 9/16" Screw (4)</p>	

Important Notes:

Lay out all components prior to start of assembly.


Flat level surface recommended for assembly.

If any components are missing or damaged do not return to retailer. Please call Rugged Ranch Products at: 760-734-3748.

Please visit our website to see our complete line of Rugged Ranch Products.
www.ruggedranch.net


**Two washers will be used for each bolt. One for the front, one for the back.

Step 1

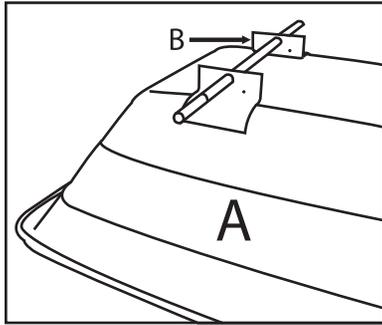


Turn Tub (A) upside down and place Axle (B) on top near the front end of the cart.

Step 2

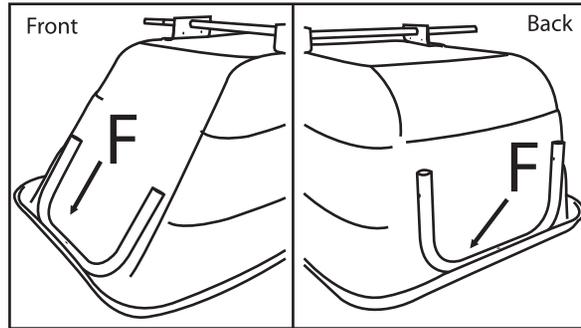


Take Cage Support Front and Back (F) and place inside the lip, centrally.

Step 3

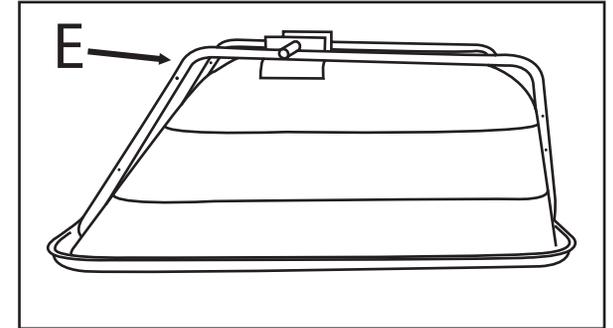


Take Cage Support Bottom (E) bars (2) and place them inside the Cage Support Front/Back Bars and connect with Screws (Part P) and nut. Do not tighten.

Step 4

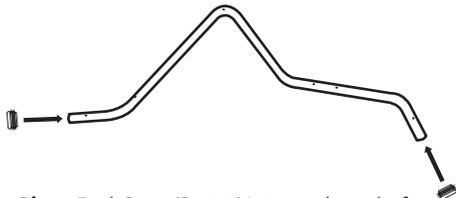


Place End Caps (Part K) into each end of the two Leg Support Bars.

Step 5

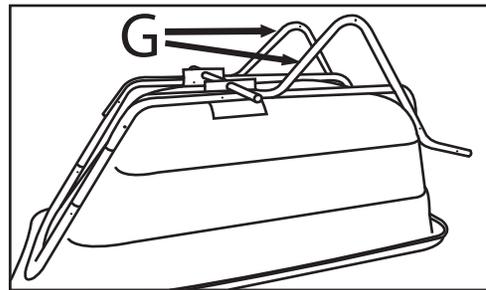


Place both Leg Support Bars (G) on outside of Cage Support bars. Secure Legs and Cage Supports to Axle Plate using 4 Screws (Part T). Also, connect Cage Support to Leg Supports using 4 Screws (Part S), Two in front, two in back. Snug ALL bolts at this time.

Step 6

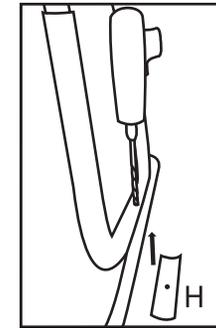


Make sure cage support system is centered and drill hole through plastic lip on each end of the cart using the holes in the support bars as a guide. Use Screws (Part R) to fasten frame to tub on both ends. Also, place Lip Protector (H) on top of lip on both ends before fastening.

Step 7

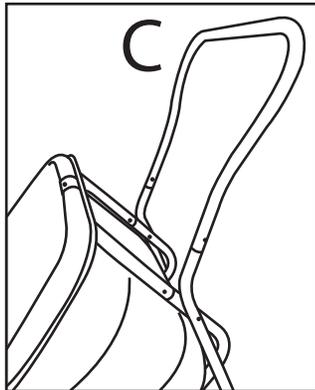


Add Handle Bar (C) and fasten with two Screws (Part P) and Wing Nut (Part L).

Step 8

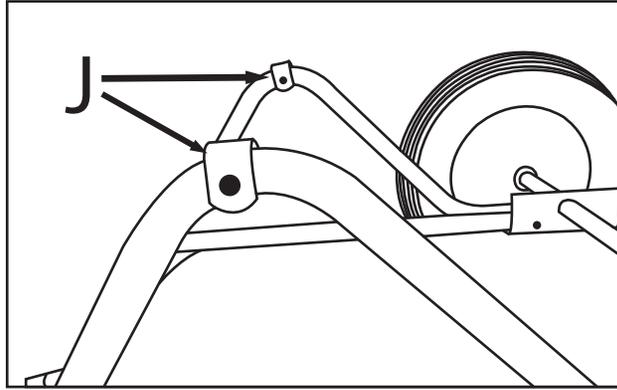


Add Skid Caps (J) to bottom of Legs using two Screws (Part Q).

Step 9

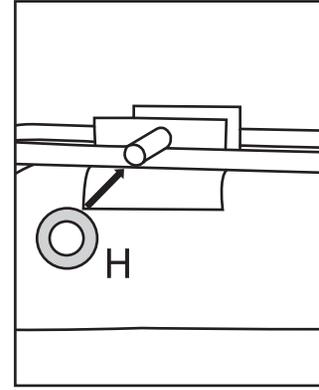

Add Large Washers (I) to both sides of the axle and then add wheels (D).

Step 10

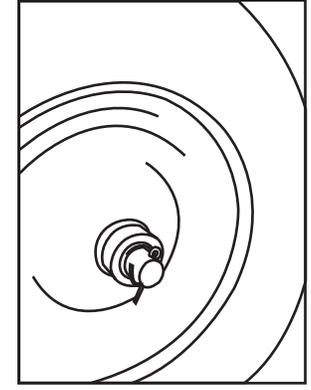

Add Cotter Pin (N) to each axle to secure wheels.